


SPECIFICATION

9L PLUS II 4~5 TON

			PFD 40	PFG 40	PFD 45	PFG 45	PFD 50	PFG 50
CHARACTERISTICS								
Capacity	Q	Load	kg	4000	4000	4500	4500	5000
Load center	C	Distance	mm	600	600	600	600	600
Power type		Diesel, Gasoline, LPG, Electric		Diesel	LPG	Diesel	LPG	Diesel
Operation type		Pedestrian, Stand, Sit		Sit	Sit	Sit	Sit	Sit
Tire type		P=Pneumatic, S=Solide	front/rear	P / P	P / P	P / P	P / P	P / P
Wheels (X:driven)		Number	front/rear	2X / 2	2X / 2	2X / 2	2X / 2	2X / 2
DIMENSIONS								
Lift at 2-stage mast	h3	Lift	mm	3000	3000	3000	3000	3000
	h2	Standard free lift	mm	0	0	0	0	0
	h5	Optional free lift	mm	1014	1014	1014	962	962
Load bracket	h8	Height of load bracket	mm	1116	1116	1116	1116	1158
Fork size		Thickness(s)×Width(e)×Length(l)	mm	50 x 150 x 1220	50 x 150 x 1220	50 x 150 x 1220	50 x 150 x 1220	60 x 150 x 1220
Mast tilting angle		Forward(α)/Back(β)	deg	6° / 12°	6° / 12°	6° / 12°	6° / 12°	6° / 12°
Overall dimensions	L2	Length to face of forks	mm	3125	3125	3175	3175	3325
	B	Total width	mm	1490 / 1770	1490 / 1770	1490 / 1770	1490 / 1770	1490 / 1770
	h1	Mast hight lowered	mm	2190	2190	2190	2190	2190
	h4	Mast height extended	mm	4125	4125	4125	4170	4170
	h6	Overhead guard height	mm	2270	2270	2270	2270	2270
	h7	Seat height	mm	1312	1312	1312	1312	1312
Turning radius	R		mm	2700	2700	2875	2875	2985
Load distance	X	From center of front axle	mm	570	570	570	570	570
Aisle width	Ast	For load 800×1200/1000×1200	mm	4270 / 4470	4270 / 4470	4270 / 4470	4270 / 4470	4270 / 4470
CHASSIS								
Tire size		Number: front/rear		2/2	2/2	2/2	2/2	2/2
		Front	mm	300-15-20PR.	300-15-20PR.	300-15-20PR.	300-15-20PR.	300-15-20PR.
		Rear	mm	7.00-12-12PR.	7.00-12-12PR.	7.00-12-12PR.	7.00-12-12PR.	7.00-12-12PR.
Wheelbase	Y		mm	2000	2000	2050	2050	2200
Tread		Center of tires front (std/dual)	mm	1150 / 1380	1150 / 1380	1150 / 1380	1150 / 1380	1150 / 1380
		Center of tires rear	mm	1190	1190	1190	1190	1190
Ground clearance	m1	At lowest point	mm	140	140	140	140	140
	m2	Center of wheelbase	mm	222	222	222	222	222
Service brake		Operation/control		Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Parking brake		Operation/control		Hand	Hand	Hand	Hand	Hand
POWER								
Battery	Type		EFB 130D31L-SMF	EFB 130D31L-SMF	EFB 130D31L-SMF	EFB 130D31L-SMF	EFB 130D31L-SMF	EFB 130D31L-SMF
	Voltage	V	12	12	12	12	12	12
	Capacity	Ah/20hr	85	85	85	85	85	85
	Dimension (LxWxH)	mm	305 x 173 x 202	305 x 173 x 202	305 x 173 x 202	305 x 173 x 202	305 x 173 x 202	305 x 173 x 202
	Weight	kg	22	22	22	22	22	22
Engine	Manufacturer		KUBOTA	KUBOTA	KUBOTA	KUBOTA	KUBOTA	KUBOTA
	Model		V3307-CR-TIE5B-TFT-1	KUBOTA WG3800-L-ESC-TFT-1	V3307-CR-TIE5B-TFT-1	KUBOTA WG3800-L-ESC-TFT-1	V3307-CR-TIE5B-TFT-1	KUBOTA WG3800-L-ESC-TFT-1
	Rated speed	rpm	2400	2600	2400	2600	2400	2600
	Rated Output	Kw	55.4	70	55.4	70	55.4	70
	Cylinders no. /displacement	No./CC	4 / 3331	4 / 3769	4 / 3331	4 / 3769	4 / 3331	4 / 3769
Transmission	Type		Powershift	Powershift	Powershift	Powershift	Powershift	Powershift
	Stage Fwd./Rev.	no.	2 / 1	2 / 1	2 / 1	2 / 1	2 / 1	2 / 1

* This is only for reference and not subject to notice in advance if there is any modification. DOC. S/N : DEB090-02

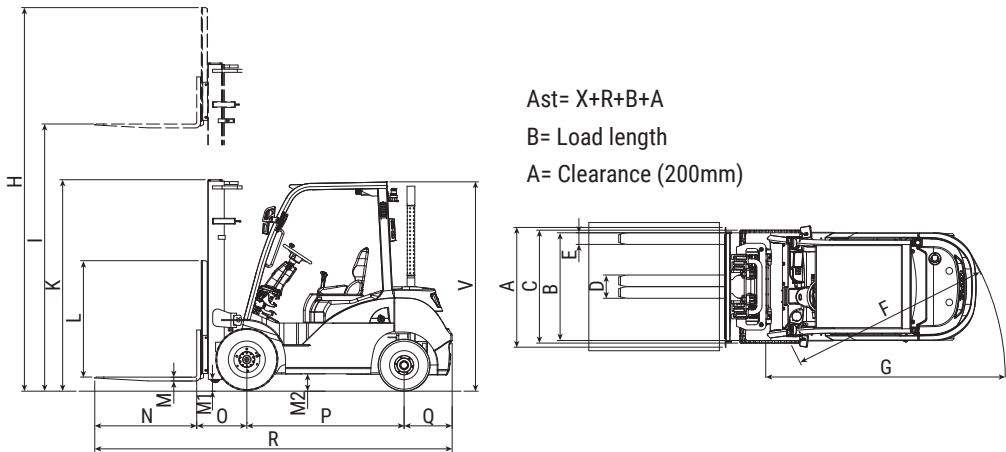

Ast= X+R+B+A
B= Load length
A= Clearance (200mm)



TAIWAN



Tailift Material Handling Taiwan Co., Ltd.

Head Office

No.5, ZiLi 1st Rd., Nankang Ind. Zone,
Nantou City 540, Taiwan R.O.C

TEL: +886-49 226 3800

FAX: +886-49 225 2919

E-Mail: insales@tailift.com.tw

www.tailift.com

Taichung Office

No.269, Section 1, Shein Lin Rd., Taya
Dist., Taichung City 428, Taiwan R.O.C

TEL: +886-4 2565 8816

FAX: +886-4 2565 8817



DOC. S/N: DEB090 Edition: 02



TOYOTA INDUSTRIES GROUP

TAILIFT FORKLIFT

FEATURES 9L PLUS II 4~5 TON

The new 9L Plus II counterbalanced trucks from Tailift now with Kubota engines comply with the latest European Stage V regulations. The advanced stage V technology provides cleaner solutions and performance to meet customers would expect, whether it's diesel or LPG forklift trucks.

The new 9L Plus II has been designed for durability, productivity, comfort and safety. Brand new economy 9L Plus II series meets customers' requirements in terms of quality, productivity and safety. With a new transmission provides simple operation and easy maintenance



Clear Top Visibility



Clear Down Visibility



CLEAR VISIBILITY FOR OPERATORS

Clear rear visibility and wide forward visibility



NEW COMBINATIONAL LED LIGHTS

Integral head light and directional lights. Provide longer service lift with much lower power consumption.



HIGH MOUNTED COMBINATION REAR LIGHTS

Integral OHG light include side, reverse, rear lights, brake and direction indicators.



INTEGRAL HEAVY DUTY CHASSIS

A strong no-bolt integral heavy duty chassis gives the driver more protection from falling loads, suite for all kind working surface.



MULTIFUNCTIONAL INSTRUMENT PANEL

Easy read instrument panel installs in between steering wheel and left front side wind shield. It display the status of forklift performance without interfering by steering wheel operations.



SPACIOUS OPERATION IN SPACE

Accelerate / Brake / Inching pedal all configurations with ergonomic design. Wide-open foot space provides the comfortable foot activity space.

The enlarged space give operator great comfortable and less stress, make the operator get on or get off the vehicle more easily.



ADJUSTABLE STEERING WHEEL COLUMN

The easy-handling steering wheel column with tilt adjustment helps to provide the ideal operating position and improve performance.



COMFORTABLE SEAT

- Ergonomic sharp design and adjustable backrest
- Adjustable forward and reverse
- Retractable safety belt



NON-SLIP ENTRY STEP

Large foot space and non-slip make the operator get on and get off the forklift more easily.



REAR ASSIST GRIP WITH HORN BUTTON

An optionally available rear assist grip with a horn button supports easy horn operation while traveling in reverse.

ENGINE

EMISSIONS COMPLIANCE

Meeting rigid emissions regulations to comply with stringent regulations: EPA/CARB Tier4 + EU Stage V.

HIGH PERFORMANCE LOW FUEL CONSUMPTION ENGINES

The engine has low original emissions, a high post-processing regeneration efficiency and low regeneration triggering criteria.

OUTSTANDING PERFORMANCE

With stable idle loading performance, full torque output, high performance of resistance to stalling at low speeds.

GREAT COMFORT

With a built-in high-pressure common rail, fuel injector etc., the engine has low noise, comfortable sounds and less vibration.

EASY MAINTENANCE

The Kubota engine is highly integrated and has a compact engine structure and parts to be maintained arranged on one side to enable easy maintenance.

ADVANCED DPF TECHNOLOGY

Diesel Particulate Filters (DPF) are essential to meeting EU Stage V emission regulations. With many years of experience in DPF engines that enables automatic regeneration even at a low rpms, giving your product a competitive edge.

